

RECTANGULAR IP66 150 1H P E 63 850

Product information

Index	13.5519.3607.63
EAN	8431956207649
Category	Selfcontained luminaires
Family	Rectangular

Light and electrical features

Self-test	No
Light source	LED
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Number of LEDs	4
Visual indications (LED colour)	Green
Glow wire test	850°C
Type	Maintained
Lifetime of LED sources [h]	50000
Real luminous flux [lm]	150
Real power of luminaire [W]	2.23

Battery

Battery type	Ni-Cd
Battery voltage	2,4V
Capacity	1,2Ah


Mechanical features

Installation	wall surface
Impact protection (IK)	8
Colour	white RAL 9003
Material	PSA
Ingress protection degree (IP)	66
Dimensions A x B x H [mm]	100 x 342 x 79
Weight [kg]	0.597



Rectangular is a complete range of luminaires with a standard and essential design that allows its use in a wide range of environments. Its waterproof version is especially suitable for installations that require a higher degree of protection.

Consult us for custom made versions.

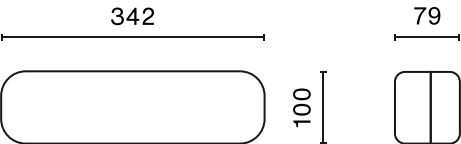

RECTANGULAR IP66 150 1H P E 63 850

Light distribution

