

Product information

Index	13.2035.1133.63
Category	Selfcontained luminaires
Family	Klover

Light and electrical features


Self-test	No
Light source	LED
Type	Non maintained
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Lifetime of LED sources [h]	50000
Colour temperature [K]	6500
Number of LEDs	7
Real luminous flux [lm]	240

Battery

Autonomy [h]	1
Battery type	Ni-Cd
Capacity	0,8Ah
Battery voltage	3,6V


Mechanical features

Installation	wall surface
Material	Polycarbonate
Colour	white RAL 9003
Ingress protection degree (IP)	44
Impact protection (IK)	4
Dimensions A x B x H [mm]	119 x 262 x 38
Weight [kg]	0.274




The new KLOVER family has been designed to achieve the maximum use of energy. In this way, thanks to its good performance, we achieve a reduction of its batteries, thus minimizing the damage caused to the environment.


Consult us for custom made versions.

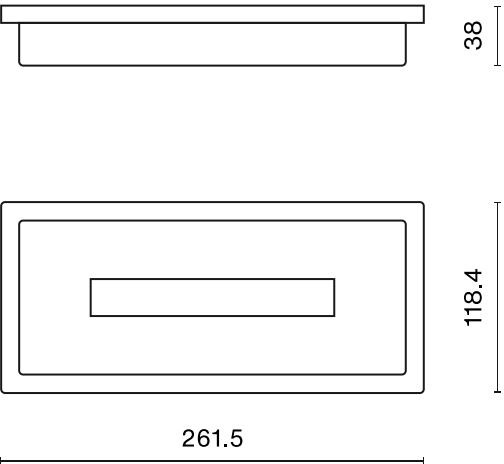

Light distribution

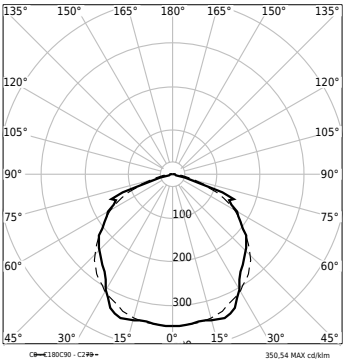

Accessories



Index: 13.2035.0002.00
Name: KLOVER Kit for ceiling-recessed installation

Index: 13.2035.0003.03
Name: KLOVER Opal diffuser



Index: 13.2035.0004.00
Name: KLOVER Set of self-adhesive signs for use only with Opal diffuser (Ref 13.2035.0003.00)



Index: 13.2035.0001.00
Name: KLOVER Conversion Kit IP65