

Product information

Index	13.5512.2050.63
Category	Architectural luminaires
Family	K-Lens

Light and electrical features

Light source	LED
Self-test	Yes
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Type	Maintained
Lifetime of LED sources [h]	50000
Real luminous flux [lm]	300
Real power of luminaire [W]	4.7

Battery

Autonomy [h]	1
Battery type	Ni-Cd
Battery voltage	3,6V
Capacity	1,5Ah


Mechanical features

Impact protection (IK)	8
Installation	ceiling surface
Colour	white RAL 9003
Ingress protection degree (IP)	44/20
Dimensions A x B x H [mm]	Ø100 x 37
Weight [kg]	0.515



K-Lens is an architectural luminaire with a lens specialized in anti-panic lighting and evacuation routes. Its design offers alternatives in terms of assembly and geometry.

Consult us for custom made versions.

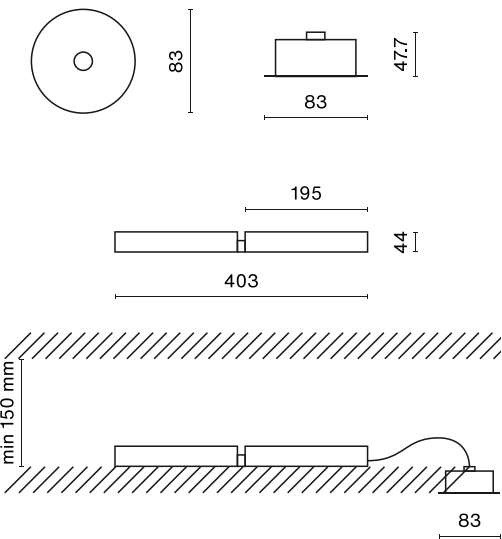

Light distribution

