

Product information

Index	13.5520.3001.63
Category	Exit signage
Family	Signum

Light and electrical features


Self-test	No
Light source	LED
Colour temperature [K]	5000
Degree of insulation	Class 1
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Visual indications (LED colour)	Green
Type	Maintained
Lifetime of LED sources [h]	50000
Real luminous flux [lm]	130
Real power of luminaire [W]	0.61

Battery

Battery voltage	2,4V
Autonomy [h]	3
Capacity	0,1Ah
Battery type	Ni-Mh

Mechanical features

Installation	ceiling surface
Colour	white RAL 9003
Material	Aluminium + PMMA
Ingress protection degree (IP)	42/20
Impact protection (IK)	3
Dimensions A x B x H [mm]	237 x 330 x 40
Weight [kg]	1.586

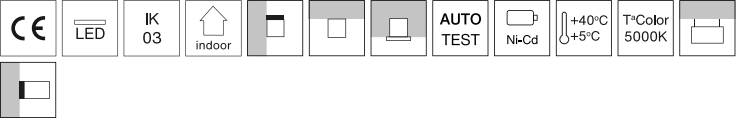

The Signum series offers a complete range of signage luminaires designed according to the UNE 23024 standards, with different installation possibilities, both on the wall and in the ceiling, and with the integration of LED technology. With this model a viewing distance of 40mts is achieved according to UNE-EN1838

Consult us for custom made versions.

