

Product information

Index	13.5503.9111.63
Category	Exit signage
Family	Brick L Banner

Light and electrical features


Light source	LED
Self-test	Yes
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Number of LEDs	4
Visual indications (LED colour)	Green
Glow wire test	850°C
Type	Maintained
Lifetime of LED sources [h]	50000
Real luminous flux [lm]	150
Real power of luminaire [W]	7.29

Battery

Autonomy [h]	1
Battery type	Ni-Cd
Battery voltage	2,4V
Capacity	0,8Ah


Mechanical features

Material	Polycarbonate
Ingress protection degree (IP)	43
Impact protection (IK)	5
Installation	ceiling surface
Colour	white RAL 9003
Dimensions A x B x H [mm]	225 x 332 x 45
Weight [kg]	0.8




Within the Brick family, the Brick L version allows to increase the output range up to 600 lumens, preserving all the benefits; with a longer length, but respecting the rest of the measures of the model. This greater length allows the use of signaling banners of up to 32mts according to UNE-EN1838.

Consult us for custom made versions.

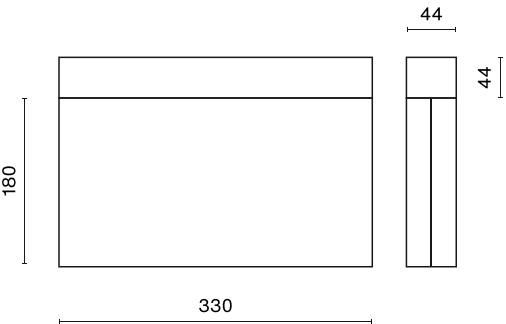


Accessories


**Index:** 13.5503.0001.00  
**Name:** BRICK L 3-phase track adapter

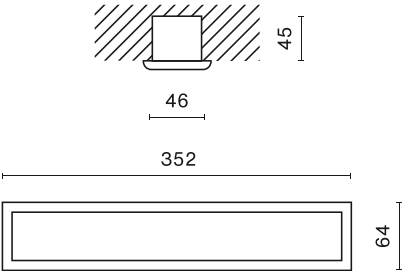


**Index:** 13.5503.0002.00  
**Name:** BRICK L Device for ceiling flush mounting . Cutout dimensions 340 x 50 mm

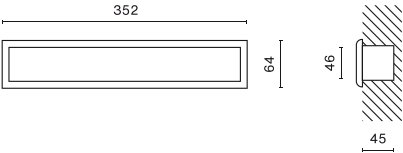

**Index:** 13.5503.0003.00  
**Name:** BRICK L Device for wall flush mounting

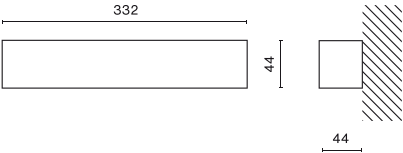

**Index:** 13.5503.0010.00  
**Name:** BRICK L Device for surface-mounted on wall

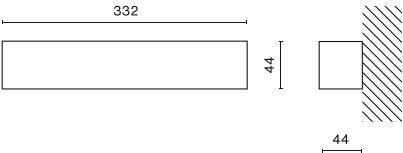

**Index:** 13.5503.0011.00  
**Name:** BRICK L Device for surface-mounted on wall silver grey