

**Product information**

<b>Index</b>	<b>13.5508.7011.63</b>
<b>Category</b>	Selfcontained luminaires
<b>Family</b>	Evolution

**Light and electrical features**


Light source	LED
Type	Non maintained
Self-test	Yes
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Lifetime of LED sources [h]	50000
Real power of luminaire [W]	1.01
Real luminous flux [lm]	500
Number of LEDs	15

**Battery**

Autonomy [h]	1
Battery voltage	6V
Battery type	Ni-Cd
Capacity	1,5Ah


**Mechanical features**

Installation	wall surface
Impact protection (IK)	8
Material	Polycarbonate
Colour	white RAL 9003
Ingress protection degree (IP)	66
Dimensions A x B x H [mm]	102 x 285 x 70
Weight [kg]	0.714

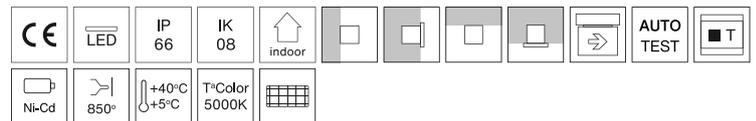


Developed as an evolution of our basic range of self-contained emergency luminaires, Evolution is ideal for installation both on the surface and recessed, respecting any architectural environment.


**Consult us for custom made versions.**

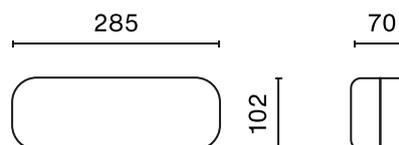

Light distribution

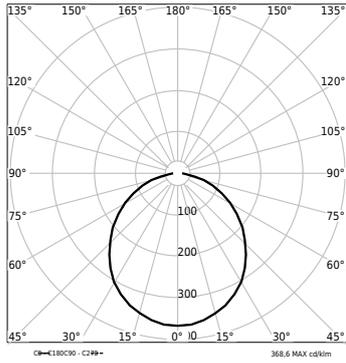

Accessories

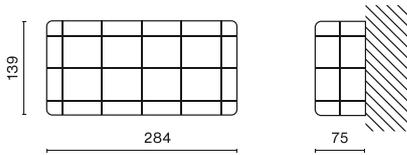

**Index:** 13.5508.0001.00  
**Name:** Anti-vandal device IK10