

Product information

|          |                          |
|----------|--------------------------|
| Index    | 13.5512.3030.63          |
| Category | Architectural luminaires |
| Family   | K-Lens                   |

Light and electrical features

|                                 |                        |
|---------------------------------|------------------------|
| Light source                    | LED                    |
| Self-test                       | Yes                    |
| Colour temperature [K]          | 5000                   |
| Operating temperature           | 5°C to 40°C            |
| Voltage                         | 220...240V, 50...60 Hz |
| Degree of insulation            | Class 2                |
| Visual indications (LED colour) | Green                  |
| Glow wire test                  | 850°C                  |
| Type                            | Maintained             |
| Lifetime of LED sources [h]     | 50000                  |
| Real luminous flux [lm]         | 460                    |
| Real power of luminaire [W]     | 5.71                   |

Battery

|                 |         |
|-----------------|---------|
| Autonomy [h]    | 3       |
| Battery type    | LiFePO4 |
| Capacity        | 3Ah     |
| Battery voltage | 6,4V    |


Mechanical features

|                                |                 |
|--------------------------------|-----------------|
| Impact protection (IK)         | 8               |
| Installation                   | ceiling surface |
| Colour                         | white RAL 9003  |
| Ingress protection degree (IP) | 44/20           |
| Dimensions A x B x H [mm]      | Ø100 x 37       |
| Weight [kg]                    | 0.662           |



K-Lens is an architectural luminaire with a lens specialized in anti-panic lighting and evacuation routes. Its design offers alternatives in terms of assembly and geometry.

Consult us for custom made versions.

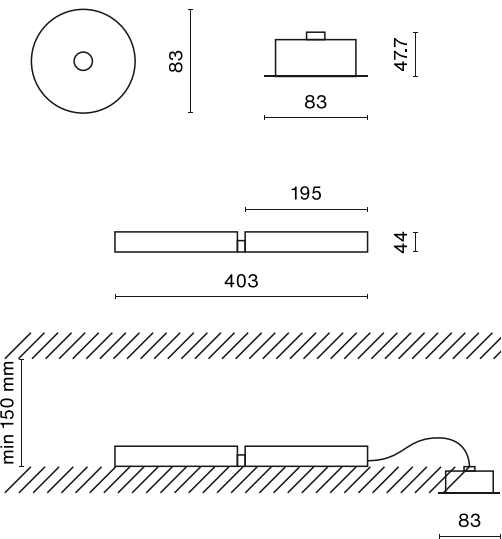

Light distribution

