

Product information

Index	13.5506.0001.00
Category	Beacons
Family	Dot

Light and electrical features

Self-test	No
Light source	LED
Operating temperature	5°C to 40°C
Visual indications (LED colour)	Green
Glow wire test	850°C
Type	Maintained
Lifetime of LED sources [h]	50000
Real luminous flux [lm]	5
Colour temperature [K]	3000-5000
Degree of insulation	Class 3
Voltage	24 VDC
Number of LEDs	1


Mechanical features

Impact protection (IK)	8
Ingress protection degree (IP)	65
Installation	wall recessed
Material	Inox
Colour	inox
Dimensions A x B x H [mm]	Ø18 x 17.5
Weight [kg]	0.09



Luminaire for beacon lighting of small dimensions. Its design, ease of assembly and high degree of IP protection make it an elegant, minimalist and practical solution for any type of space, both in indoor and outdoor applications. The possibility of selecting its color temperature (3000K or 5000K) makes it the most versatile on the market.

Consult us for custom made versions.

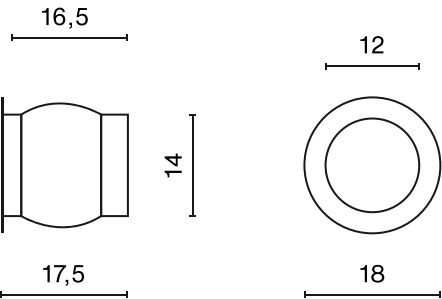

Light distribution

