

Product information

Index	13.5541.1421.63
EAN	8431956180669
Category	Beacons
Family	Everest

Light and electrical features


Self-test	No
Light source	LED
Type	Non maintained
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Lifetime of LED sources [h]	50000
Real power of luminaire [W]	0.06
Colour temperature [K]	5000/Yellow
Number of LEDs	2

Battery

Autonomy [h]	1
Battery voltage	2,4V
Battery type	Ni-Mh
Capacity	80Ah


Mechanical features

Colour	white RAL 9003
Ingress protection degree (IP)	42
Installation	wall recessed
Material	ABS
Impact protection (IK)	6
Dimensions A x B x H [mm]	80 x 80 x 44
Weight [kg]	0.11



Complete range of small recessed floors for walls and pavements, suitable for various applications, passage areas, elevator cabins, stairs ... With rectangular format, they fulfill a double function: emergency lighting and signaling.

Consult us for custom made versions.

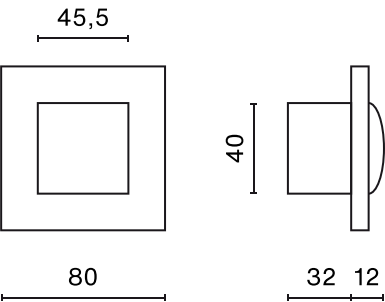

Accessories

Index: 13.5540.0000.00

Name: EVEREST Box for recessed mounting. (Ø75mm). Suitable for Square and Round Everest