

Product information

Index	13.5505.2100.63
Category	Selfcontained luminaires
Family	Cube

Light and electrical features


Light source	LED
Type	Non maintained
Self-test	Yes
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Lifetime of LED sources [h]	50000
Real power of luminaire [W]	1.01
Real luminous flux [lm]	150
Number of LEDs	24

Battery

Autonomy [h]	1
Battery type	Ni-Cd
Battery voltage	2,4V
Capacity	1,2Ah


Mechanical features

Installation	wall surface
Material	Polycarbonate
Impact protection (IK)	5
Colour	white RAL 9003
Ingress protection degree (IP)	42
Dimensions A x B x H [mm]	224 x 224 x 52,5
Weight [kg]	0.963

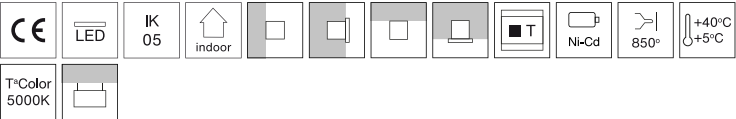


Cube is a luminaire suitable for both surface and recessed applications with a simple design, high formal purity and square format. It is applicable in very diverse environments, from offices, hotels, showrooms to common areas.


Consult us for custom made versions.

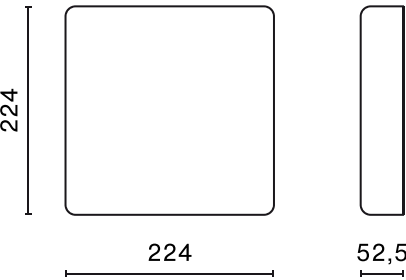



Light distribution

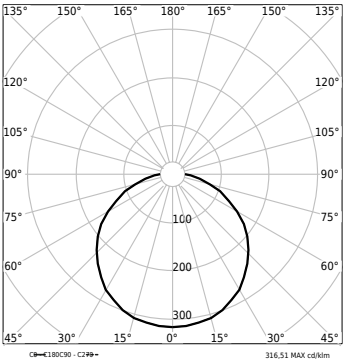

Accessories



**Index:** 13.5505.0001.00  
**Name:** CUBE Device for ceiling flush mounting. Cutout dimensions 235 x 235 mm

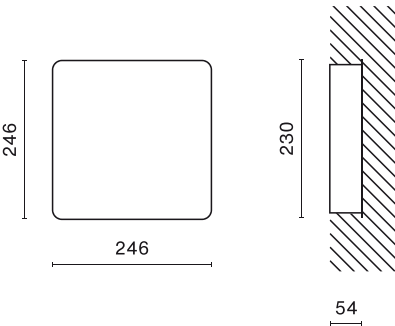

**Index:** 13.5505.0002.00  
**Name:** CUBE Device for wall flush mounting

**Index:** 13.5505.0003.00  
**Name:** CUBE / GLOBE "Right/left/down ARROW" sign. Sign dimensions 138 x 138 mm



**Index:** 13.5505.0004.00  
**Name:** CUBE / GLOBE "DOOR on right" sign. Sign dimensions 138 x 138 mm



**Index:** 13.5505.0005.00

**Name:** CUBE / GLOBE "DOOR on left" sign. Sign dimensions 138 x 138 mm