

Product information

Index	13.5510.0010.20
EAN	8431956192112
Category	Architectural luminaires
Family	K3

Light and electrical features

Self-test	No
Light source	LED
Type	Non maintained
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Lifetime of LED sources [h]	50000
Number of LEDs	3
Real luminous flux [lm]	130
Real power of luminaire [W]	0.61

Battery

Autonomy [h]	1
Battery type	Ni-Cd
Capacity	0,8Ah
Battery voltage	4,8V


Mechanical features

Installation	wall surface
Impact protection (IK)	5
Colour	inox
Material	PC-Opal
Ingress protection degree (IP)	43/20
Dimensions A x B x H [mm]	Ø56 x 62
Weight [kg]	0.3




K3 is a luminaire of small size and excellent technical performance due to the incorporation of LED technology. Thanks to its dimensions and its different finishing options, it is fully integrated with the rest of the lighting and goes completely unnoticed.

Consult us for custom made versions.

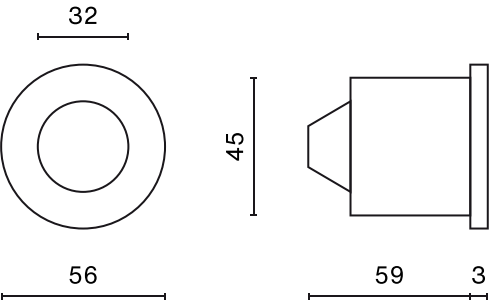

Light distribution

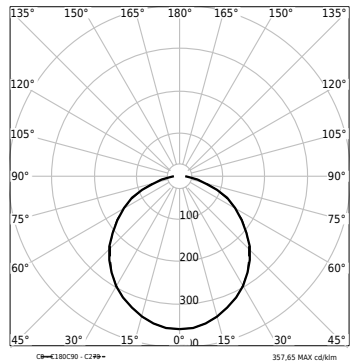

Accessories

**Index:** 13.5510.00001.00  
**Name:** K3 Replacement device