

Product information

Index	13.5517.1110.63
Category	Projectors
Family	Plus

Light and electrical features

Light source	LED
Type	Non maintained
Self-test	Yes
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Lifetime of LED sources [h]	50000
Real power of luminaire [W]	1.91
Real luminous flux [lm]	1100

Battery

Autonomy [h]	1
Battery type	Ni-Cd
Battery voltage	3,6V
Capacity	4Ah


Mechanical features

Installation	wall surface
Colour	white RAL 9003
Ingress protection degree (IP)	42
Impact protection (IK)	4
Material	PC + ABS
Dimensions A x B x H [mm]	172 x 583 x 127
Weight [kg]	2.73



Range of emergency lighting projectors especially suitable for high-rise installations. Equipped with LED lighting sources and whose orientation, allows to direct the concentrated or expanded light beam as needed.

Consult us for custom made versions.

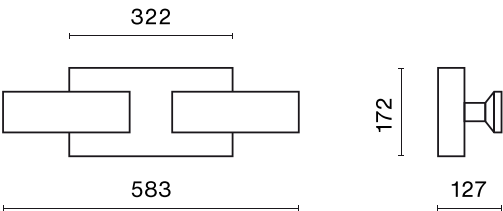

Light distribution

