

Product information


|          |                 |
|----------|-----------------|
| Index    | 13.5541.3201.63 |
| EAN      | 8431956181581   |
| Category | Beacons         |
| Family   | Everest         |

Light and electrical features

|                                 |             |
|---------------------------------|-------------|
| Self-test                       | No          |
| Light source                    | LED         |
| Operating temperature           | 5°C to 40°C |
| Degree of insulation            | Class 2     |
| Visual indications (LED colour) | Green       |
| Glow wire test                  | 850°C       |
| Type                            | Maintained  |
| Lifetime of LED sources [h]     | 50000       |
| Voltage                         | 24 VDC      |
| Real power of luminaire [W]     | 0.06        |
| Colour temperature [K]          | 5000/Yellow |
| Number of LEDs                  | 2           |


Mechanical features

|                                |                |
|--------------------------------|----------------|
| Colour                         | white RAL 9003 |
| Ingress protection degree (IP) | 42             |
| Installation                   | wall recessed  |
| Material                       | ABS            |
| Impact protection (IK)         | 6              |
| Dimensions A x B x H [mm]      | 80 x 80 x 44   |
| Weight [kg]                    | 0.11           |



Complete range of small recessed floors for walls and pavements, suitable for various applications, passage areas, elevator cabins, stairs ... With rectangular format, they fulfill a double function: emergency lighting and signaling.

Consult us for custom made versions.

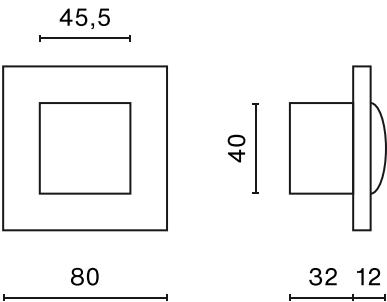

Accessories

**Index:** 13.5540.0000.00  
**Name:** EVEREST Box for recessed mounting. (Ø75mm). Suitable for Square and Round Everest