

Product information

Index	13.5508.5001.63
EAN	8431956203955
Category	Selfcontained luminaires
Family	Evolution

Light and electrical features


Self-test	No
Light source	LED
Type	Non maintained
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Lifetime of LED sources [h]	50000
Real luminous flux [lm]	300
Number of LEDs	8
Real power of luminaire [W]	0.67

Battery

Autonomy [h]	1
Battery type	Ni-Cd
Battery voltage	3,6V
Capacity	1,5Ah


Mechanical features

Installation	wall surface
Impact protection (IK)	8
Material	Polycarbonate
Colour	white RAL 9003
Ingress protection degree (IP)	66
Dimensions A x B x H [mm]	102 x 285 x 70
Weight [kg]	0.625




Developed as an evolution of our basic range of self-contained emergency luminaires, Evolution is ideal for installation both on the surface and recessed, respecting any architectural environment.


Consult us for custom made versions.

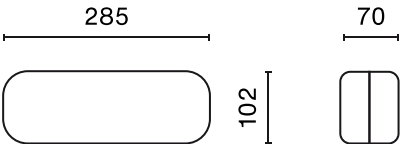

Light distribution

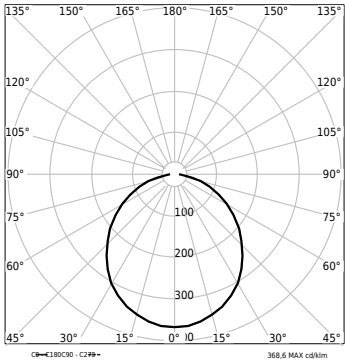

Accessories

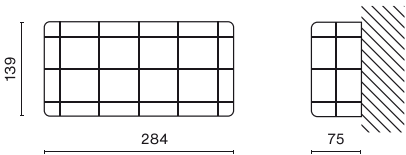

**Index:** 13.5508.0001.00  
**Name:** Anti-vandal device IK10