

SD 1900 1H NP E 63 850 (two light sources)

Product information

Index	13.5522.0111.63
EAN	8431956204204
Category	Projectors
Family	SD

Light and electrical features

Self-test	No
Light source	LED
Type	Non maintained
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Real power of luminaire [W]	3.25
Real luminous flux [lm]	1900

Battery

Autonomy [h]	1
Battery type	Ni-Cd
Battery voltage	12V
Capacity	3,4Ah

Mechanical features

Installation	wall surface
Impact protection (IK)	8
Colour	white RAL 9003
Ingress protection degree (IP)	65
Dimensions A x B x H [mm]	325 x 240 x 110
Weight [kg]	2.756



CE

LED

IP 65

IK 08

indoor

AUTO TEST

Ni-Cd

850°

+40°C
+5°C


T°CColor 5000K

180°

120°

Complete range of high power projectors suitable for installation at high altitudes (5 meters or higher). They are especially suitable for use in large supermarkets, industrial buildings, supermarkets...

Consult us for custom made versions.

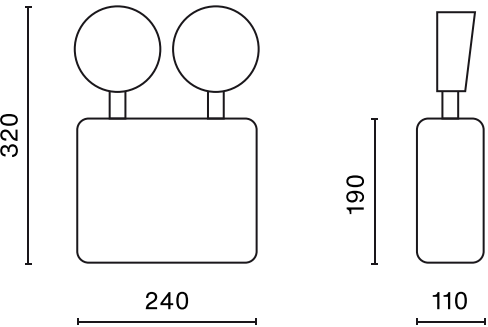

Light distribution

