

Product information

Index	13.2037.1132.63
Category	Architectural luminaires
Family	K-Mini

Light and electrical features

Light source	LED
Type	Non maintained
Self-test	Yes
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Lifetime of LED sources [h]	50000
Real luminous flux [lm]	182

Battery

Autonomy [h]	2
Battery voltage	3,2V
Capacity	1,5Ah
Battery type	LiFePO4


Mechanical features

Material	Polycarbonate
Impact protection (IK)	5
Colour	white RAL 9003
Ingress protection degree (IP)	20
Installation	recessed
Dimensions A x B x H [mm]	Ø40 (30 x 173 x 23)
Weight [kg]	0.155



K-MINI offers maximum performance and functionality with minimal visual impact on the environments in which it is installed. With a diameter of just 40mm it is a solution that allows to achieve the regulatory requirements of emergency lighting respecting the design of the interiors. It has specific optics for anti-panic and evacuation lighting.

Consult us for custom made versions.

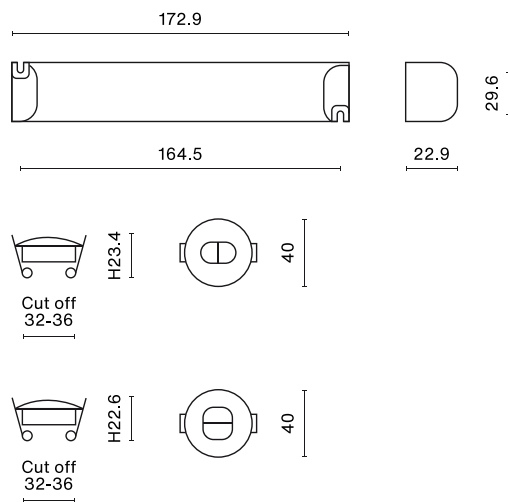

Light distribution

