

Product information

Index	13.5502.0142.63
Category	Selfcontained luminaires
Family	Brick

Light and electrical features


Light source	LED
Self-test	Yes
Colour temperature [K]	5000
Operating temperature	5°C to 40°C
Voltage	220...240V, 50...60 Hz
Degree of insulation	Class 2
Visual indications (LED colour)	Green
Glow wire test	850°C
Type	Maintained
Lifetime of LED sources [h]	50000
Real luminous flux [lm]	200
Number of LEDs	6
Real power of luminaire [W]	2.51

Battery

Autonomy [h]	1
Battery type	Ni-Cd
Battery voltage	2,4V
Capacity	1,6Ah


Mechanical features

Installation	wall surface
Material	Polycarbonate
Colour	opal
Ingress protection degree (IP)	43
Impact protection (IK)	5
Dimensions A x B x H [mm]	45 x 202 x 45
Weight [kg]	0.279



Stylized design of pure and essential lines. Its small size and geometric characteristics provide the necessary security with the least possible visual impact. Suitable for wall mounting with horizontal or vertical emission using its accessories. Intelligent self-test system for the correct maintenance of the batteries, prevention and detection of failures.


Consult us for custom made versions.

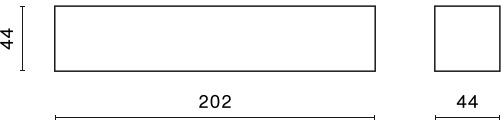


Light distribution




Accessories

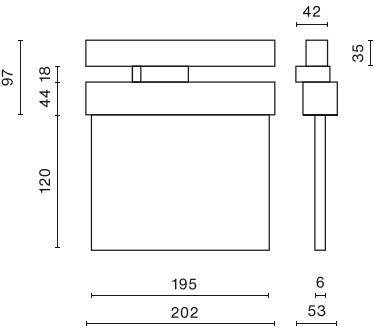


**Index:** 13.5502.0001.00  
**Name:** BRICK 3-phase track adapter white

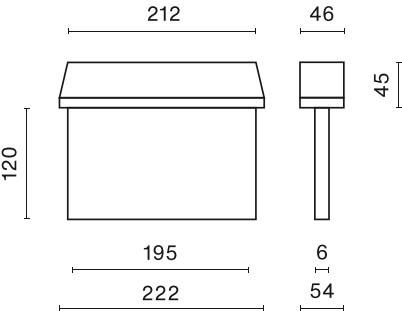

**Index:** 13.5502.0002.00  
**Name:** BRICK Device for ceiling flush mounting. Cutout dimensions 215 x 50 mm

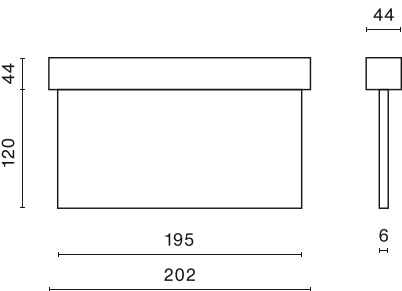


**Index:** 13.5502.0003.00  
**Name:** BRICK Device for wall flush mounting white

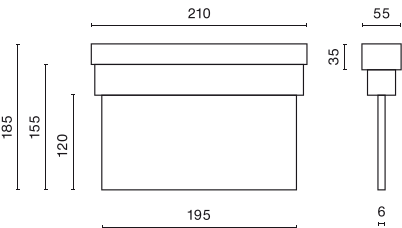

**Index:** 13.5502.0004.00  
**Name:** BRICK Device for surface-mounted on wall white

BRICK ST 200 1H P E 63 850

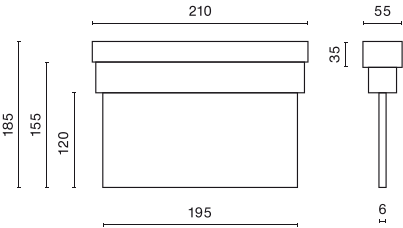

**Index:** 13.5502.0005.00  
**Name:** BRICK Device for surface-mounted on wall silver grey